


Family: Orleans | Item No. 1991 RB



Drawing 1 - Fixture Mounting

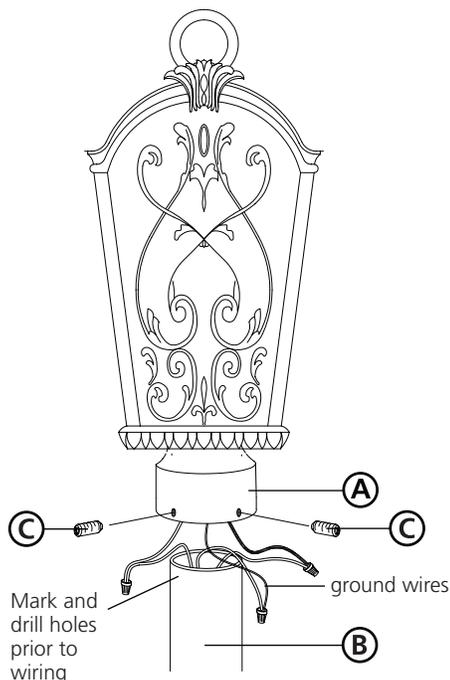

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first installing the glass, making all necessary electrical connections, mounting the fixture to pre-installed post, and assembling the main body of the fixture.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. to install glass, remove screws (2) from main cage assembly (1), which retain the glass clips (3) in place - see **Drawing 2**.
2. Slide glass panels into cage (1), making sure bottom of glass is in front of tab in bottom of cage.
3. Replace glass clips (3) using screws (2) that were removed earlier.

1. Fixture is mounted using 3 - 1/4-20 set screws.
2. Make all necessary electrical connections following wiring instructions below.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.


4

1. After wiring connections are complete, slip post fitter (A) over top of pre-installed post (B) making sure all wire connections are tucked inside the pole - see **Drawing 2**.
2. When fixture is slipped over pole make sure no wires are being pinched between the top edge of the pole and the inside of the post fitter.
3. Thread the 3 set screws (C) into pre-tapped holes in post fitter.
4. Tighten screws (C) to secure fixture to post.

5

1. Prior to assembling main body, fixture can now be lamped accordingly.
2. Place roof (4) onto top of main body (1), making sure to line up holes in the roof (4) with the studs (5) on the main body - see **Drawing 2**.
3. Thread on ball knobs (6) and hand tighten to secure roof.
Note: Over tightening may make it difficult to remove roof to re-lamp.

Drawing 2 - Lamp Installation

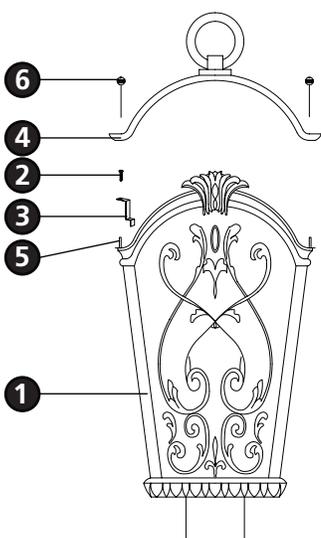

Note: Maximum wattage for 1991 fixture is 40 watts per bulb.

2.7.08