


I.S. 35000 Mounting Instructions

Family: **LOFT** | Item No. FR35004 / FR35007 /
FR35014 / FR35017




start here

Fixture Mounting

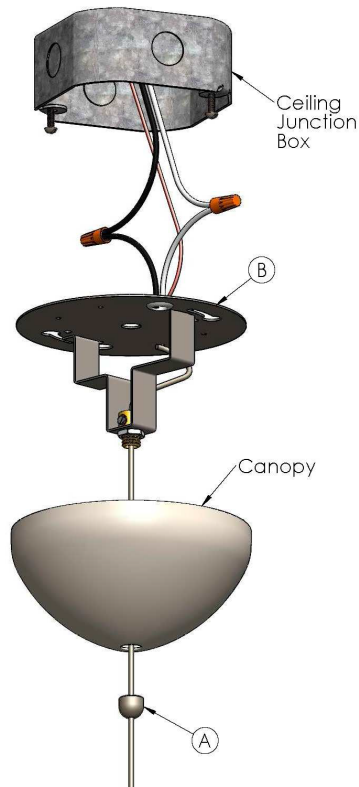

Fixture Adjustment

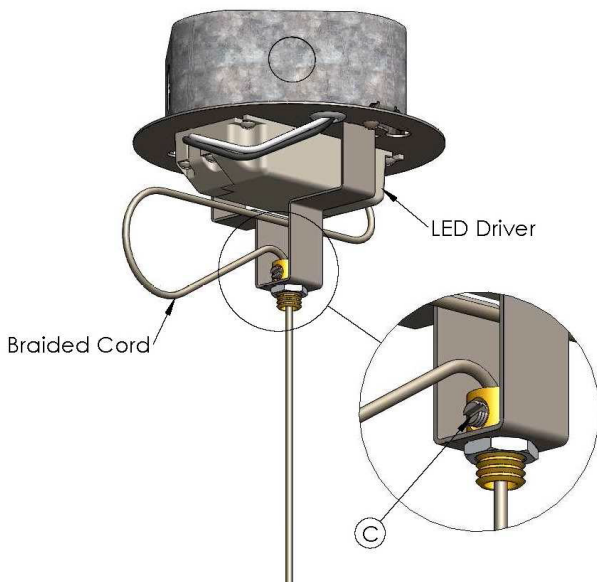

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (IS18). TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITY FOR CODE REQUIREMENTS.

1. Find a clear area to work.
2. Unpack fixture from carton.
3. Carefully review instructions prior to assembly.

This fixture is designed to be directly mounted to a ceiling junction box with a 3-1/2" center to center mounting distance.

Fixture Mounting:

1. Make electrical connections according instructions on IS18.
2. Unthread **Canopy Finial (A)** and slide canopy down wire.
3. Keyhole slots in **Mounting Plate (B)** should fit over screws that came with the junction box. Turn mounting plate until the screws reach the end of the slot.
4. Tighten screws until snug.
5. Proceed to fixture adjustment instructions.

Fixture Adjustment:

6. Fixture is completely wired to the driver (**do not disconnect the braided wire from the driver**).
7. Using a flat bladed screw driver turn the set screw (C) in a counter clockwise direction until the braided wire moves freely.
8. Pull cable up and out until the desired fixture height is reached. Extra wire can be wrapped around the mounting bracket.
9. Slide canopy up the braided wire and lock in place using the canopy finial.
10. Save these instructions.

