



# NEST

FR41621ORB

Bulbs: 100W MED.

Replacement Parts: GLASS: R41621GL

## ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first attaching the mounting hardware to the junction box, making all necessary electrical connections, mounting the fixture to the ceiling and then installing the glass.

**SAFETY WARNING:** Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.


### STEP 1

- 1 Prepare mounting strap (a) by threading the two long mounting screws (b) into the back of the mounting strap (a), making sure the holes into which the screws are threaded match the spacing of holes (d) in the backplate (e) - See Drawing 1.
- 2 Attach mounting strap (a) to junction box (j) using two screws (c).
- 3 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS 18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 4 To mount fixture, slip the two mounting screws (b) through the two mounting holes (d) in the canopy (e).
- 5 While holding fixture in place, thread the two ball knobs (f) on to the end of the mounting screws (b), and tighten.


### STEP 2

- 1 Prior to installing glass, fixture can now be lamped accordingly.
- 2 Slip glass (2) over harp (g) located in center of the main body (1) and hold in position.
- 3 Slip flat washer (3) onto harp (g) and hold in position.
- 4 Thread hex nut (4) onto end of harp (g) and tighten.
- 5 Slip cap (5) onto end of harp (g).
- 6 Thread knob (6) onto end of harp (g) and tighten.

[DRAWING 1]

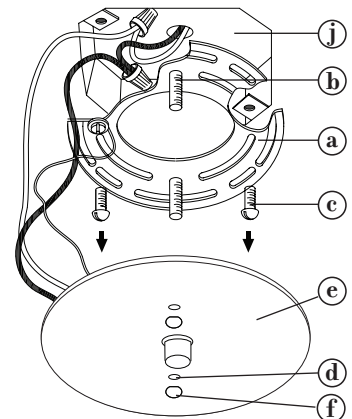

[DRAWING 2]

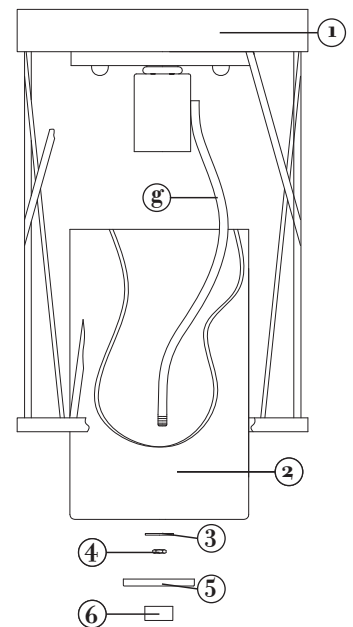

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

9.28.09